



Modular ice maker - Pebble system
Daily production up to 140 kg

Hotel								
Restaurant								
Fast food								
Bar								
Disco								
Fish market								
Supermarket								
Medical & SPA								
Industry								

► Features & Plus

- Pebble ice - 91% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume 1 m³ = 550 kg of ice
- Removable and cleanable air filter
- AISI 304 SS evaporator
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- Dust-proof water basin
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- Standard and special voltages
- Frame in INOX
- HFC Free




► Position n°



► Usable Bins

- Bin 240PE
- Bin 110
- Bin 200
- Roller Bin 100



Removable and cleanable air filter



AISI 304 SS evaporator




Dust-proof water basin



Frame in INOX

► Available pebble size

drawing for reference only



► Prod. 24h

	Air temp.		Water temp.		Kg	Lbs
	10° C	50° F	7° C	45° F	140	309
	21° C	70° F	15° C	60° F	130	287

2 Years Warranty

subject to limitations

► **Certifications available for this model**






Ice Pebbles

TM 140 HC



Modular ice maker - Pebble system Daily production up to 140 kg

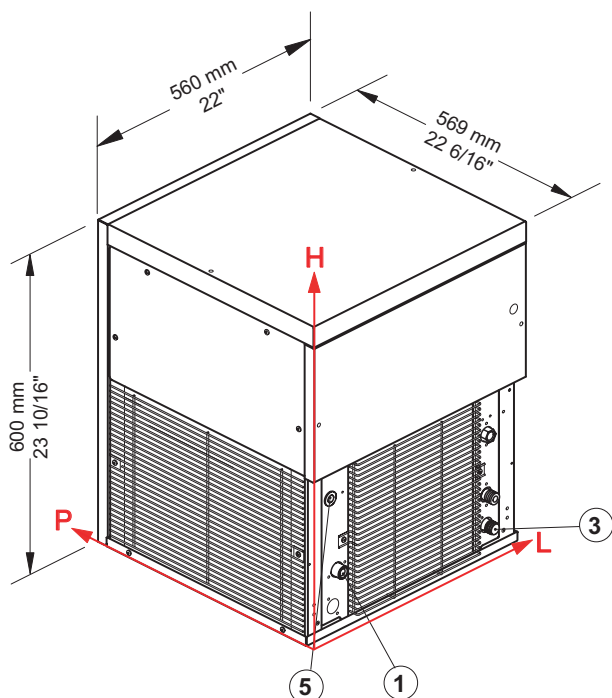

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	140 kg					
	50° F		309 lbs				
	21° C			130 kg			
	70° F				287 lbs		
	32° C					119 kg	
	90° F						262 lbs

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 85,5 mm / 3 6/16" - 130 mm / 5 2/16" - 3/4"
- ③ Water out.: 479,5 mm / 18 14/16" - 65 mm / 2 9/16" - 24 mm / 15/16"
- ⑤ Electrical connections: 67,5 mm / 2 11/16" - 290 mm / 11 7/16"

► Technical information

Production in 24h	130 kg / 287 lbs
Cooling system	A - W
Approximate pebble size	8 x 16 x 7
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	700 W
Fuse	10 A
Electrical consumption	13 kWh/100kg

Water consumption	A: 1 l/kg - 12,0 gal/100 lbs
	W: 7,4 l/kg - 88,7 gal/100 lbs
Sizes (L-P-H mm)	560 - 569 - 600
(L-P-H in)	22 - 22 6/16 - 23 10/16
Sizes with pack (L-P-H mm)	645 - 645 - 810
(L-P-H in)	25 6/16 - 25 6/16 - 31 14/16
Net weight	63 kg / 139 lbs
Gross weight	74 kg / 163 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information need to be considered at the following conditions:

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 01.1 - Issued November 2018



www.bremaice.it
info@bremaice.it

Bim + Data
download

